

# Towards Generalization Processes of LiDAR Data based on GRID and OGC Web Processing Services

Sandra Lanig<sup>1</sup>, Alexander Zipf<sup>1</sup>

<sup>1</sup>Department of Geography, Chair of Cartography, University of Bonn  
{lanig,zipf}@geographie.uni-bonn.de

**Abstract.** The use of Airborne Laserscanner Data (ALS or LiDAR, Light Detection And Ranging) is increasingly used for generating very detailed high resolution Digital Elevation Models (DEM). However, massive amount of data result through the enormous data acquisition rate and the high spatial point density. In order to make the high quality surface manageable it is necessary to reduce the high number of the data points. For this methods of generalization and simplification are usually used. Data storage and processing of the high quality LiDAR data sets can be hardly managed within current desktop Geographic Information Systems (GIS). Both computing power for data processing and storage organization supporting data access are required in addition to simplification algorithms for the LiDAR point cloud data. To achieve high processing performance and storage capabilities the use of GRID Computing is a promising option. This paper propose a Web Processing Service (WPS) for Generalizing DEM data. The WPS is based on the specifications of the Open Geospatial Consortium (OGC) and it provides generalization functionalities for massive LiDAR data through a standardized Web interface. In order to use the advantages of the GRID, the WPS Generalization Service is made accessible as GRID service.

## 1 INTRODUCTION

High quality surface models play an important role in different domains from 3D city models to disaster management. Through newly available data acquisition techniques such as *Airborne Laserscanner Data* (ALS or LiDAR) it is possible to gain high-precision and spatial densly surface data. The questions related to this new acquisition technique are: 1) Where can these massive data sets be stored; and more important 2) How can these amounts of surface data sets be processed in an efficient way. The outcome of this is the main question: How can we manage the larger and larger 3D surface data sets? Such data can be several giga-bytes in size, or may contain millions of measurement points.

To minimize the number of the massive laser scanning points in order to reduce the huge amount of data and optimize processing time, we need methods for approximations of the original high resolution LiDAR data sets. For this purpose, diverse generalization or simplification algorithms and, in

other words for terrain visualization in computer graphics, different algorithms for generating *Level of Details* (LOD) are available.

In order to share and access distributed spatial data and resources, *Spatial Data Infrastructures* (SDIs) are generally used. Based on *Service Oriented Architectures* (SOA), SDI supports discovery, access to distributed geospatial data and use of geographic information (Nebert, D. (Ed.) 2004). Nevertheless, data storage and processing of raw LiDAR data sets could hardly be managed within classical SOA based SDIs. LiDAR data processing requires access to computing power and storage capacity as well as several simplification processing algorithms for the high point cloud density. To achieve high processing performance and storage load of current existing IT resources the use of GRID Computing is being evaluated within the project GDI-GRID ([www.gdi-grid.de](http://www.gdi-grid.de)).

This paper presents an approach to offer a *Web Processing Service* (WPS) for different surface simplification algorithms based on the specification of the *Open Geospatial Consortium* (OGC) that makes generalization functionalities for massive LiDAR data accessible through a standardized Web interface. In order to use the advantages of the GRID, the WPS Generalization Service is made accessible as GRID service. In the following we give a short introduction to LiDAR and describe basic generalization techniques for point cloud data as well as the fundamentals of SOA, starting with a description of the WPS interface and an introduction to GRID services in general. The following sections explain the architecture and the prototypical implementation. We finish with a conclusion and an outlook.

## 2 BACKGROUND

### 2.1 Airborne Laserscanner Data

Airborne LiDAR (*Light Detection And Ranging*) data is one of the most important techniques for studying the earth's surface of a wide range with up-to-date DEMs with a high degree of accuracy (Wever, 1999). The LiDAR system consists of three components: a laserscanner, an *Inertial Measurement Unit* (IMU) and a *Global Positioning System* (GPS). The laserscanner gauging the earth surface and classify the measurement points into first and last pulse data sets. Typically the system returns up to forty points per square meter with an absolute vertical accuracy of better than 0,15 m. Due to this high point density, LiDAR data offers geo-scientist now the possibility to study processes based on DEMs at very detailed res-

olutions. However, managing and analyzing these massive LiDAR DEMs in classical desktop GIS is currently difficult.

## 2.2 The OGC Web Processing Service (WPS) Interface

Based on *Service Oriented Architectures* (SOA), SDIs are primarily used to discovery, access and share distributed geospatial data. However, the core of SDIs are processing and analysing functions. Therefore a recognized standard for distributed spatial data processing was missing for a long time. This issue was addressed by the development of a *Web Processing Service* (WPS), which has been approved as official standard by the OGC in December 2007 (Schut, 2007). The WPS makes real processing functionality available through an OpenGIS Web standard. The rather generic WPS standard defines a web-based interface to distribute and execute geospatial processes in arbitrary complexity. This allows developing more complex services using standardized interfaces via the Internet by providing the possibility of performing practically any geospatial analysis and manipulation on geospatial data.

The specification defines three mandatory operations performed by a WPS. The *getCapabilities* operation returns a brief service metadata XML document describing the resources of the specific server implementation, and gives a short description of each process offered by the WPS instance. The *describeProcess* operation returns a detailed description of a process including its required input- (including the allowed formats) and output-parameter. Finally the *execute* operation runs the offered process. These operations can be requested by a client via HTTP and performed by a WPS server implementation.

The data input and output can be simple literal values such as integer or double numbers as well as character strings (*LiteralData*), BoundingBox data structure like two pairs of coordinates or *ComplexValue* and *ComplexValueReference* that indicates complex data sets such as GML (*Geography Markup Language*) encoded fragments and raster, vector or other (large) data files. The data in the *ComplexValue* is part of the request/response document, whereas the *ComplexValueReference* handover the URL reference to the location, where the data can be downloaded. The input data can be managed by storing the data on the server and as part of or only referenced at the request document.

## 2.3 GRID Services

For determining whether system is a GRID, Forster proposes a three-point checklist. According to this a GRID system “coordinates resources that are not subject to centralized control using standard, open, general-

purpose protocols and interfaces to deliver nontrivial qualities of services” (Foster, 2002).

The objective of the *Open Grid Service Architecture* (OGSA) is to define an open and standardized architecture for grid-based applications to standardize all the services for job and resource management, security etc. by specifying a set of standard interfaces. Normally a Web service is stateless. The *Web Service Resource Framework* (WSRF) identifies and provides a set of operation that Web services may implement to become stateful services using Web service technologies (*WS-Resource*). The WSRF is an open GRID standard to define Web services for GRID Computing, or in other words is the infrastructure on which the OGSA is built on. Encapsulated within the *WS-Addressing* endpoint reference and the *WS-ResourceProperties*, the identifier of the specific resources are included inside the client request as well as a simple URI address or complex XML content.

Following the IT mainstream, the underlying standards of the WSRF are *Web Service Description Language* (WSDL) and *Simple Object Access Protocol* (SOAP) which are publicized by the W3C. *Grid services* are WSRF-based Web services integrated in GRID Computing infrastructure. To create WSRF compliant GRID applications the *Globus Toolkit 4* (GT4) includes some high-level services for resource monitoring, discovery, job submission, security, and data management that we can use.

## **2.4 Linking OGC SOA to WSRF-based GRID Services**

In order to connect the GI community with the GRID community the OGC and the OGF (*Open Grid Forum*) are working together to specify interfaces, best practices and enhance existing GRID Computing and OGC standards. Therefore the OGF signed a memorandum of understanding to collaborate with the OGC. One objective of the collaboration is to integrate the OGC WPS standard with a range of back-end processing environments to enable large-scale processing. As we regard it of particular interest for both the GI and the Grid community, we focus on the OGC WPS standard.

## **3 OVERVIEW GENERALIZATION TECHNIQUES**

There are numerous reasons for the simplification of surface models. On the one hand it is essential to reduce the storage requirement as well as the data set in particular for Web applications. The aim is to remove irrelevant details, in order to give better overview and the focus to important details and produce different LOD for visualization issues. Further reasons for

DEM generalization are speeding display, reducing redundancy and transmitting time or aesthetic causes.

There are different methods for simplification. Firstly, lines can be simplified (line simplification). The Douglas Peucker (DP) algorithm (Douglas, 1973) is the most practiced algorithm used for curve smoothing and point thinning by distance measurement. Secondly, there are simplification algorithms for 3D buildings (Glander and Döllner, 2007, Rau et al., 2006) and finally for surface simplifications. Heckbert and Garland (1997) give a good survey of polygonal surface generalization algorithm.

There exist different operations for simplification or aggregation which determine the features for elimination. These are vertex removal, vertex pair collapse, vertex clustering, edge collapse, triangle collapse, and triangle removal.

#### 4 SYSTEM ARCHITECTURE

The system architecture of the grid-enabled WPS Terrain Generalization service is illustrated in Figure 1. The design follows the three tier architecture. Clients access the generalization service by the standardized OGC WPS interface operations *getCapabilities*, *describeProcess* and *execute*.

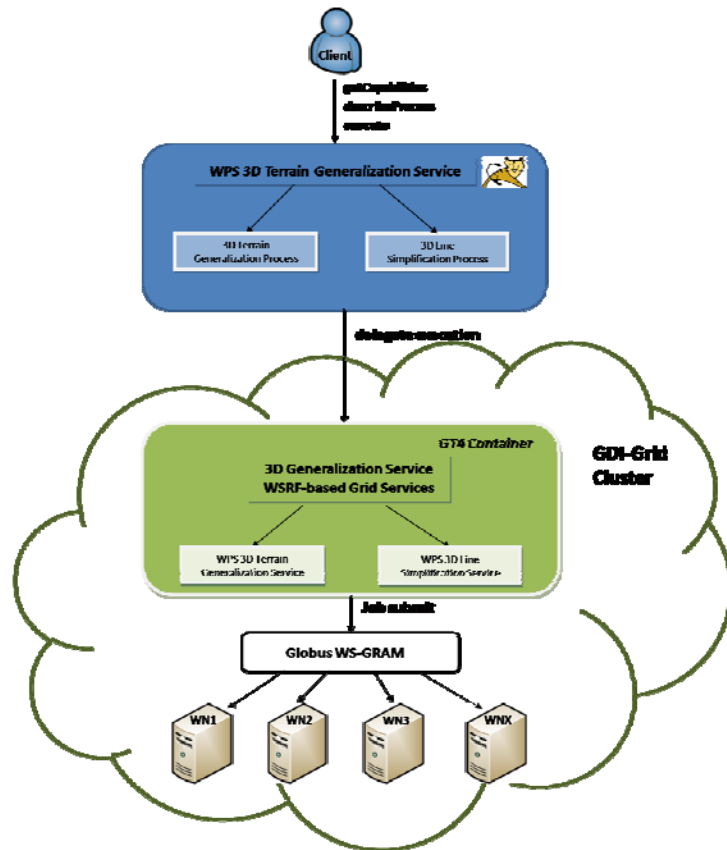


Figure 1 Architecture of the 3D Terrain Generalization Service

As soon as a client has acquired sufficient information by the requested *getCapabilities* and *describeProcess* XML documents, the selected generalization process can be submitted to the server by the *execute* operation. In order to execute the simplification processes at the GRID, each implemented OGC WPS process is mapped to a corresponding GRID service. In order to ensure security, all authentication credentials from the client must be delegated by creating temporary proxy certificate to the GRID service.

To develop WSRF compliant Grid applications the *Globus Toolkit 4* (GT4) includes some high-level services for resource monitoring, discovery, job submission, security, and data management that can be used. The WSRF-based GRID service integrates a WSDL description and can be addressed by SOAP. The WPS server acts in this case as client component and calls the corresponding WSRF-based 3D Generalization Web service using a SOAP request. Therefore, the WPS *execute* operation is wrapped as SOAP request.

The simplification of the surface data takes place as job execution on GRID clusters. Each cluster possesses a GRAM (*Grid Resource Allocation and Management*) service, which receives the jobs and distributes it on the free *worker nodes* (WN) in the cluster. The GT4 *Web Service GRAM* (WS GRAM) is addressed like a normal GRID service. On the individual worker nodes the GRID jobs run as executable files. First, before the actual job starts, the necessary data have to be transported to the node (stage-in). The input data is stored on the server and referenced within the request document as URL. If the terrain processing is successful, the result is sent back to the WPS as GML or in facts of huge terrain data, only the XML document with the URL reference where the results are stored.

## **5 WPS SURFACE GENERALIZATION SERVICE**

The goal of the WPS Generalization Service is to offer multi-scale elevation models with different *Levels of Details* (LOD). Especially in a real-time environment, the dense surface meshes from raw LiDAR data must be generalized in a pre-processing step to provide adaptive mesh resolution and to use the main advantages of LODs, data reduction, fast data access and hierarchical processing. A typical usage example is for example, view-dependent generalization using high resolution objects in the foreground and lower LODs for distant improve performance for visualization objectives. The surface geometry is stored as *Triangulated Irregular Network* (TIN). For this several surface simplification algorithms have been developed e.g. by DeFloriani (1996) or Lindstrom (1996).

Depending on specific application requirements, we implement diverse generalization algorithms to handle geometric data efficiently as proof of concept. Firstly, a surface simplification algorithm, which used quadric error metrics, provided by Garland and Heckbert (1997) has been implemented (Schilling et al. 2007). The algorithm is based on an iterative generalization of edge aggregation by vertex pair contraction. The error approximation for simplification of each vertex is the sum of squared distances to the planes. Secondly, the *Douglas Peucker* (DP) algorithm (Douglas, 1973) that is the most practiced algorithm used for curve smoothing and point thinning by distance measurement is used.

Currently, several processing frameworks and implementations based on the OGC WPS standard exist. A first version of a generic WPS Generalization Service has been developed within the deegree framework (Heier, 2005). Recently, this Java framework has been upgraded to deegree3 and offering the main building blocks for SDI based on standards of the OGC and ISO/TC 211 (ISO Technical Committee 211 – Geographic Information/Geomatics) and implements the WPS specification version 1.0.0 (Schut 2007).

## **6 CONCLUSION AND FUTURE WORK**

The need for computing power and storage capacity is steadily rising within geo-community. In particular LiDAR data is being used to create a high-resolution 3D model of the Earth's surface. But to process these vast LiDAR data sets means to compute million of raw data points and running computationally intensive algorithms. We have presented in this paper a possibility to make the processing of massive LiDAR data easier using standardized WPS in relation with GRID Computing. Scientists will be able to access the WPS Surface Generalization Service choosing their DEM data source and the generalization algorithm via a Web interface. Users then will be able to execute computationally intensive LiDAR data processing tasks on GRID computing resources through a standardized WPS interface.

An additional optimization is the integration of the WSRF- and WPS-based services into workflows. Fleuren (2008) discusses the problems of designing a workflow based on standard OGC Web services and WSRF-based services. For orchestrating services the use of the de facto standard BPEL (*Business Process Execution Language*) allows the construction of complex workflows. An early evaluation of this approach for OGC Web services has been provided by Weiser & Zipf 2007. After the execution the user could save and reuse the workflow description. Our future work will focus

on the integration of our WPS and WSRF-based services into the geospatial workflow engine that based on the BPEL. The client can combine different LiDAR processing algorithms by creating simple XML documents.

## **7 ACKNOWLEDGMENTS**

This work is part of the Spatial Data Infrastructure Grid (GDI-Grid) funded by the German Federal Ministry of Education and Research (BMBF) and is still work in process. The main goal of the project is the efficient mining and processing of spatial data for the simulation of noise, dispersion and disaster management. We thank all colleagues at project partners and within our research group for their input and Arne Schilling for implementing the base of some of the processes of the simplification library.

## **8 REFERENCES**

- Douglas, D. and Peucker, T. (1973). Algorithms for the reduction of the number of points required to represent a digitized line or its caricature. *The Canadian Cartographer* 10(2), pp. 112-122.
- Fleuren, T. and Müller, P. (2008). BPEL Workflows Combining Standard OGC Web Services and Grid-enabled OGC Web Services" in Proceedings of the 34th Euromicro Conference on Software Engineering and Advanced Applications, Parma, Italy.
- Foster, I (2002). What is the Grid? A Three Point Checklist. *GRIDToday*, July 20.
- Glander, T. and Döllner, J. (2007). Cell-based generalization of 3D building groups with outlier management. In: *GIS '07: Proceedings of the 15th annual ACM international symposium on Advances in geographic information systems*, ACM, New York, NY, USA, pp. 1–4.
- Heckbert, P.S. and Garland, M. (1997). Survey of Polygonal Simplification Algorithms. In: *Multiresolution Surface Modeling Course, SIGGRAPH '97*, Los Angeles, USA.
- Heier, C., Kiehle, C. (2005). Geodatenverarbeitung im Internet - der OGC Web Processing Service. *GIS 2005* 6, 39–43
- Nebert D (Ed.) (2004). *Developing Spatial Data Infrastructures: The SDI Cookbook Version 2.0*, GSDI, p.6. [Online available from: <http://gsdi.org/docs2004/Cookbook/cookbookV2.0.pdf>] Accessed 10 Sept 2008



- Rau, J., Chen, L., Tsai, F., Hsiao, K. and Hsu, W. (2006). LoD generation for 3D polyhedral building models. In: *Advances in Image and Video Technology*, Springer Verlag, pp. 44–53.
- Schilling, A., Basanow, J., Zipf, A. (2007): VECTOR BASED MAPPING OF POLYGONS ON IRREGULAR TERRAIN MESHES FOR WEB 3D MAP SERVICES. 3rd International Conference on Web Information Systems and Technologies (WEBIST). Barcelona, Spain. March 2007.
- Schilling, A., Lanig, S., Neis, P. & Zipf, A. (2008), Integrating Terrain Surface and Street Network for 3D Routing, 3D Geoinfo 08, 3rd International Workshop on 3D Geo-Information, Seoul, South Korea.
- Schut, P. (2007). OpenGIS Web Processing Service. OpenGIS standard: OGC 05-007r7
- Weiser A. & A. Zipf (2007): Web Servicee Orchestration (WSO) of OGC Web Services for Disaster Management. GI4DM. Toronto. Canada.
- Wever, Ch. and Lindenberger, J. (1999). Experiences of 10 years laser scanning. *Proceedings of the Photogrammetry Week '99*, Stuttgart, pp. 125-132.